



ELECTRICAL & INDUSTRIAL PRODUCTS CATALOG



CONTENTS

METAL CONDUITS FLEXIBLE CONDUITS	01 – 04
---	----------------

CONDUIT FITTINGS AND ACCESSORIES	05 – 09
---	----------------

WEATHERPROOF BOXES	10 – 14
---------------------------	----------------

METAL CONDUITS BOXES	14 – 16
-----------------------------	----------------

STRUT CHANNEL AND SUPPORT	17 – 17
----------------------------------	----------------

CABEL TRAY, CABLE LADDER GI TRUNKING	18 – 19
---	----------------

DISTRIBUTTION BOX	20 – 21
--------------------------	----------------

CONDUIT AND FITTINGS

EMT (Electrical Metallic Tubing) ANSI C80.3–1983 UL979

Trade Size	Outside Diameter		Minimum wall thickness		Standard Weight		Length
	In.	mm.	In.	mm.	lbs/ft	kg/m	
1/2.	0.706	17.93	0.042	1.07	0.285	0.424	10
3/4	0.922	23.42	0.049	1.25	0.435	0.647	10
1	1.163	29.54	0.057	1.45	0.640	0.952	10
1-1/4	1-510	38.35	0.065	1.65	0.950	1.414	10
1-1/2	1-740	44.20	0.065	1.65	1.10	1.637	10
2	2.197	55.80	0.065	1.65	1.40	2.083	10
2-1/2	2-875	73.00	0.072	1.83	2.32	3.450	10
3	3.500	88.90	0.072	1.83	2.80	4.164	10
3-1/2	4.000	101.6	0.083	2.11	3.37	5.013	10
4	4.500	114.3	0.083	2.11	3.78	5.623	10



IMC (Intermediate Metal Conduit) UL 1242-1983

Size	Outside Diameter						Minimum wall thickness		Length without coupling	
	Nominal		Minimum		Maxmum					
In.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
1/2.	0.815	20.7	0.810	20.6	0.820	20.8	0.070	1.78	9-11-1/4	3029.0
3/4	1.029	26.1	1.024	26.0	1.034	26.3	0.075	1.91	9-11-1/4	3029.0
1	1.290	32.8	1.285	32.6	1.295	32.9	0.085	2.16	9-11	3022.6
1-1/4	1.638	41.6	1.630	41.4	1.645	41.8	0.085	2.16	9-11	3022.6
1-1/2	1.883	47.8	1.875	47.6	1.890	48.0	0.090	2.29	9-11	3022.6
2	2.360	59.9	2.352	59.7	2.367	60.1	0.095	2.41	9-11	3022.6
2-1/2	2-857	72.6	2.847	72.3	2.867	72.8	0.140	3.56	9-11-1/2	3099.9
3	3.476	88.3	3.466	88.0	3.486	88.5	0.140	3.56	9-11-1/2	3099.9
3-1/2	3.971	100.9	3.961	100.6	3.981	101.1	0.140	3.56	9-11-1/4	3003.6
4	4.466	113.3	4.456	113.2	4.476	113.7	0.140	3.56	9-11-1/4	3003.6



RIGID CONDUIT (Rigid Metal Conduit)

Size	Outside Diameter		Inside Diameter		Wall Thickness		Length	
	In.	mm.	In.	mm.	In.	mm.	feet	mm.
1/2.	0.840	21.34	0.632	16.50	0.104	2.64	10	3050
3/4	1.050	26.67	0.836	21.23	0.107	2.72	10	3050
1	1.315	33.40	1.063	27.00	0.126	3.20	10	3050
1-1/4	1.660	42.16	1.394	35.41	0.133	3.38	10	3050
1-1/2	1.900	48.26	1.624	41.25	0.138	3.51	10	3050
2	2.375	60.33	2.083	52.91	0.146	3.71	10	3050
2-1/2	2.875	73.03	2.489	63.22	0.193	4.90	10	3050
3	3.500	88.90	3.090	78.49	0.205	5.21	10	3050
3-1/2	4.000	101.60	3.570	90.68	0.215	5.46	10	3050
4	4.500	114.30	4.050	102.87	0.225	5.72	10	3050
5	5.563	141.30	5.073	128.85	0.245	6.22	10	3050
6	6.626	168.30	6.094	154.78	0.266	6.76	10	3050



Bs4568 CONDUIT PTI:1970

Screwed both ends with one coupler

Size	Outside Diameter		Nominal Thickness	Length w/o coupling	No. of Length per Bundle	No. of Bundle per Lift	Weight pre Length
	MIN	MAX					
Heavy Gauge							
16mm	15.7mm	16.0mm	1.4±0.10mm	3.75meters	10	20	±1.95kg
20mm	19.7mm	20.0mm	1.6±0.15mm	3.75meters	10	20	±2.90kg
25mm	24.6mm	25.0mm	1.6±0.15mm	3.75meters	10	20	±3.70kg
32mm	31.6mm	32.0mm	1.6±0.15mm	3.75meters	5	20	±4.90kg
40mm	39.6mm	40.0mm	1.6±0.15mm	3.75meters	Information available at time of order		
50mm	49.6mm	50.0mm	1.8±0.15mm	3.75meters			
63mm	62.6mm	63.0mm	1.8±0.15mm	3.75meters			
75mm	74.6mm	75.0mm	1.8±0.15mm	3.75meters			
Medium Gauge							
16mm	15.7mm	16.0mm	1.2±0.15mm	3.75meters	Information available at time of order		
20mm	19.7mm	20.0mm	1.2±0.15mm	3.75meters			
25mm	24.6mm	25.0mm	1.2±0.15mm	3.75meters			
32mm	31.6mm	32.0mm	1.2±0.15mm	3.75meters			



Bs31 CONDUIT PTI:1970

Screwed both ends with one coupler

Size	Outside Diameter		Nominal Thickness	Length w/o coupling	No. of Length per Bundle	No. of Bundle per Lift	Weight pre Length
	MIN	MAX					
Heavy Gauge							
3/4	18.8mm	19.1mm	1.6±0.10mm	3.75meters	10	20	±2.50kg
1	25.1mm	25.4mm	1.6±0.10mm	3.75meters	10	20	±3.50kg
1-1/4	31.5mm	31.8mm	1.6±0.10mm	3.75meters	5	20	±4.50kg
1-1/2	37.8mm	38.1mm	1.8±0.10mm	3.75meters	Information available at time of order		
2	50.5mm	50.8mm	2.0±0.10mm	3.75meters			
2-1/2	63.2mm	63.5mm	2.0±0.10mm	3.75meters			
Medium Gauge							
3/4	18.8mm	19.1mm	1.2±0.10mm	3.75meters	10	20	±2.50kg
1	25.1mm	25.4mm	1.2±0.10mm	3.75meters	10	20	±3.50kg
1-1/4	31.5mm	31.8mm	1.2±0.10mm	3.75meters	5	20	±4.50kg
1-1/2	37.8mm	38.1mm	1.4±0.10mm	3.75meters	Information available at time of order		
2	50.5mm	50.8mm	1.6±0.10mm	3.75meters			
2-1/2	63.2mm	63.5mm	2.0±0.10mm	3.75meters			



LIQUID TIGHT FLEXIBLE STEEL CONDUIT

Galvanized steel core, corrosion resistant

Size	Inside Dia (mm)		Outside Dia (mm)		Min.Bend Radius (mm)	Min.Bend Radius (mm)
	MIN	MAX	MIN	MAX		
3/8	12.30	12.80	17.50	18.00	60	30,50,100
1/2	15.80	16.30	20.80	21.30	80	30,50,100
3/4	20.70	21.20	26.20	26.70	100	30,50,100
1	26.20	26.20	32.70	33.40	150	30,50
1-1/4	34.80	35.40	41.40	42.20	180	15,30
1-1/2	40.10	40.60	47.40	48.30	200	15,30
2	5.30	51.90	59.40	60.30	250	15,30
2-1/2	63.00	63.60	72.10	73.00	300	7.5,15
3	78.00	78.80	87.90	88.90	450	7.5
4	101.60	102.60	113.20	114.30	600	7.5



METAL FLEXIBLE CONDUIT

Material: Galvanized steel


Size	Inside Diameter (mm)		Outside Diameter (mm)		Coil Packaging (m)
	MIN	MAX	MIN	MAX	
3/8	12.3	12.8	15.7	16.2	30,50,100
1/2	15.8	16.3	19.2	19.7	30,50,100
3/4	20.7	21.2	24.5	25.1	30,50,100
1	26.4	26.8	30.4	31.0	30,50
1-1/4	34.7	35.4	39.6	40.3	15,25
1-1/2	40.0	40.6	45.2	45.8	15,25
2	51.3	51.9	56.5	57.1	15,25
2-1/2	63.0	63.6	70.2	70.8	15
3	78.0	78.7	85.2	85.9	10
4	101.6	102.6	108.5	109.5	10



PVC COATED FLEXIBLE CONDUIT

Material: Galvanized steel, PVC jacket

Size	Inside Diameter (mm)		Outside Diameter (mm)		Coil Packaging (m)
	MIN	MAX	MIN	MAX	
3/8	12.3	12.8	16.7	17.2	30,50,100
1/2	15.8	16.3	20.2	20.7	30,50,100
3/4	20.7	21.2	25.5	26.1	30,50,100
1	26.4	26.8	31.6	32.2	30,50
1-1/4	35.05	35.4	40.8	41.5	15,25
1-1/2	40.0	40.6	46.6	47.2	15,25
2	51.3	51.9	58.1	58.7	15,25
2-1/2	63.0	63.6	71.8	72.4	15
3	78.0	78.7	87.2	87.9	10
4	101.6	102.6	111.2	112.3	10

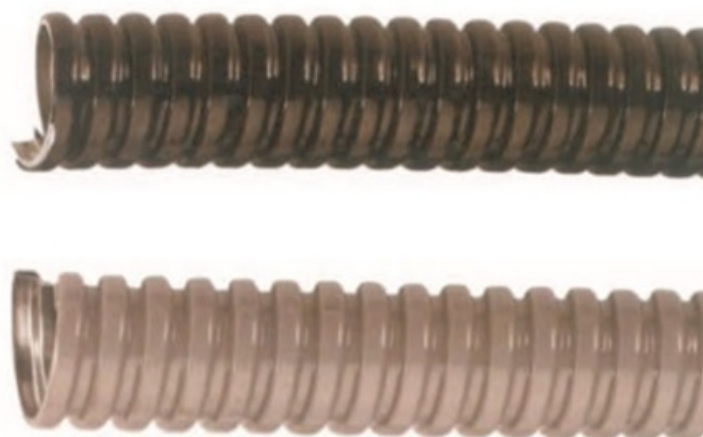

EMT CONNECTORS
SET SCREW TYPE



ZINC DIE CAST

SIZE: 1/2"-3/4"-1"-1-1/4"-1-1/2"-2"

EMT COUPLINGS
SET SCREW TYPE



ZINC DIE CAST

EMT CONNECTORS
COMPRESSION TYPE



ZINC DIE CAST

SIZE: 1/2"-3/4"-1"-1-1/4"-1-1/2"-2"

EMT COUPLINGS
COMPRESSION TYPE



ZINC DIE CAST

EMT CONNECTORS
SET SCREW TYPE



STEEL

SIZE: 1/2"-3/4"-1"-1-1/4"-1-1/2"-2"

EMT CONNECTORS
SET SCREW TYPE



STEEL

EMT CONNECTORS
COMPRESSION TYPE



STEEL

SIZE: 1/2"-3/4"-1"-1-1/4"-1-1/2"-2"

EMT COUPLINGS
COMPRESSION TYPE



STEEL

EMT 90° ELBOW
GALVANIZED STEEL



SIZE: 1/2"-3/4"-1"-1-1/4"-1-1/2"-2"

EMT 45° ELBOW
GALVANIZED STEEL



RIGID 90° ELBOW
GALVANIZED STEEL



SIZE: 1/2"-3/4"-1"-1-1/4"-1-1/2"-2"

RIGID 45° ELBOW
GALVANIZED STEEL



EMT STRAPS
TWO HOLES



STEEL

SIZE: 1/2"-3/4"-1"-1-1/4"-1-1/2"-2"

EMT STRAPS
ONE HOLE



STEEL

EMT STRAPS
TWO HOLES



STEEL

SIZE: 1/2"-3/4"-1"-1-1/4"-1-1/2"-2"

EMT STRAPS
ONE HOLE



STEEL

EMT PULL ELBOW
SET SCREW TYPE



EMT TO BOX

SIZE: 1/2"-3/4"-1"

RIGID PULL ELBOW
THREADED TYPE



ZINC DIE CAST

EMT TO EMT
SET SCREW TYPE



ZINC DIE CAST

SIZE: 1/2"-3/4"

RGS CONNECTORS



ZINC DIE CAST

EMT BENDERS
FOR EMT/IMC/RIGID



MALLEABLE IRON

SIZE: 1/2"-3/4"-1"

EMT BENDERS
FOR EMT/IMC/RIGID



ALUMINUM

GROUNDING
LOCKNUTS



STEEL

SIZE: 1/2"-3/4"-1"-1-1/4"-1-1/2"-2"

RIGID BUSHINGS
INSULATED



ZINC DIE CAST

RIGID LOCKNUTS



ZINC DIE CAST

RIGID LOCKNUTS



STEEL

INSULATING
PLASTIC BUSHINGS



105°C FLAME RETARDANT
THERMOPLASTIC

RIGID
CONDUIT BUSHINGS



ZINC DIE CAST

SIZE: 1/2"-3/4"-1"-1-1/4"-1-1/2"-2"-2-1/2"-3"-3-1/2"-4"

GROUNDING
CONDUIT BUSHING



MALLEABLE/ ZINC

SIZE: 1/2"-3/4"-1"-1-1/4"-1-1/2"-2"

RIGID COUPLINGS
TUBULAR THREADED TYPE



GALVANIZED STEEL

RIGID WATERTIGHT
HUBS



ZINC DIE CAST

SIZE: 1/2"-3/4"-1"-1-1/4"-1-1/2"-2"

RIGID WATERTIGHT HUBS
W/BONDING SCREW



ZINC DIE CAST

CABLE CONNECTORS CLAMP TYPE



ZINC DIE CAST

SIZE: 1/2"-3/4"-1"

EMT BEAM CLAMPS



STEEL

SIZE: 1/4"-20 3/8"-16

EMT BEAM CLAMPS



MALLEABLE IRON

SIZE: M8 M10 M12

EMT BEAM CLAMPS



MALLEABLE IRON

SIZE: 1/4"-20 3/8"-16 1/2"-13

EMT ENTRANCE CAPS CLAMP ON TYPE



ALUMINUM

SIZE: 1/2"-3/4"-1"-1 1/4"-1-1 1/2"-2"

SERVICE ENTRANCE CAPS THREADED TYPE



ALUMINUM

EMT/RIGID CLAMP BACKS



MALLEABLE IRON

SIZE: 1/2"-3/4"-1"-1 1/4"-1-1 1/2"-2"

RIGID STRAPS ONE HOLE



MALLEABLE IRON

REDUCING BUSHING



STEEL / ALUMINIUM

SIZE: 1/2"-3/4"-1"-1 1/4"-1-1 1/2"-2"

RIGID COUPLINGS THREE PIECE TYPE



MALLEABLE IRON

LIQUID TIGHT CONNECTORS STRAIGHT TYPE



ZINC DIE CAST

SIZE: 1/2"-3/4"-1"-1 1/4"-1-1 1/2"-2"

LIQUID TIGHT CONNECTORS 90°ANGLE TYPE



ZINC DIE CAST

BX-FLEX CONNECTORS STRAIGHT SQUEEZE



SIZE: 1/2"-3/4"-1"-1-1/4"-1-1/12"-2"

BX-FLEX CONNECTORS ANGLE SQUEEZE



FLEX COUPLINGS SCREW IN TYPE



ZINC DIE CAST

SIZE: 1/2"-3/4"-1"-1-1/4"-1-1/12"-2"

FLEX CONNECTORS SCREW IN TYPE



ZINC DIE CAST

EMT TO BX OR NM CABLE
SET SCREW TO CLAMP TYPE



ZINC DIE CAST

SIZE: 3/8"-1/2"

EMT TO FLEX
SET SCREW TO CLAMP TYPE



ZINC DIE CAST

1/2"-1-2" 3/4"-3/4" 1"-1"

LIQUID TIGHT CONNECTORS
(QUINCUNX CAP)



STRAIGHT TYPE
ZINC DIE CAST

SIZE: 1/2"-3/4"-1"-1 1/4"-1 1/2"-2"

LIQUID TIGHT CONNECTORS
(QUINCUNX CAP)



ANGLE TYPE
ZINC DIE CAST

LIQUID TIGHT CONNECTORS
STRAIGHT TYPE



MALLEABLE IRON

SIZE: 1/2"-3/4"-1"-1 1/4"-1 1/2"-2"

LIQUID TIGHT CONNECTORS
ANGLE TYPE



MALLEABLE IRON

FLEX TO RIGID
STEEL CONDUIT



DKJ SET SCREW TYPE


SIZE: 1/2"-3/4"-1"-1 1/4"-1 1/2"-2"

FLEX TO RIGID
STEEL CONDUIT



DPN THREAD TYPE

FISH WIRE



SPRING STEEL

LENGTH: 50FT 100FT 200FT

FISH TAPE



SPRING STEEL


METAL CABLE CONNECTOR
DDJ-A



ZINC

SIZE: 1/2"-3/4"-1"-1 1/4"-1 1/2"-2"

WATERPROOF CABLE GLAND
DDJ-B

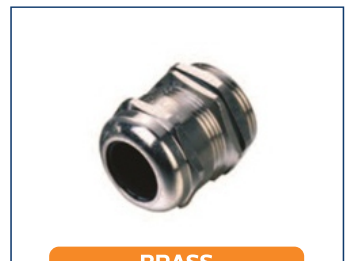

BRASS

GROUND ROD




SIZE: 3/8"-1/2"-5/8"-3/4"-1"

GROUND ROD CLAMP



GREEN GROUND
PIGTAIL



SIZE: 10/32" x 3/8"

GREEN GROUND
SCREW



SIZE: 12AWG 14AWG

1 WAY TERMINAL



SIZE: 20mm 25mm

2 WAY THROUGH



2 WAY ANGLE



3 WAY TEE



SIZE: 20mm 25mm

4 WAY INTERSECTION



LOOP IN BOX



CIRCULAR COVER



SIZE: 20mm 25mm

INSPECTION ELBOW



INSPECTION BEND



INSPECTION TEE



SIZE: 20mm 25mm

SADDLE W/BASE



COUPLING



HALF SADDLE



SIZE: 20mm 25mm

FULL SADDLE



BRASS MALE BUSH



www.ies.gy | quotes@ies.gy

CONDUIT BODIES

COPPER FREE ALUMINUM



EMT LB SET SCREW TYPE



EMT T SET SCREW TYPE



EMT LR SET SCREW TYPE



EMT LL SET SCREW TYPE



EMT C SET SCREW TYPE



RIGID THREADED LB TYPE



RIGID THREADED T TYPE



RIGID THREADED LL TYPE



RIGID THREADED LR TYPE



RIGID THREADED C TYPE



RIGID THREADED SLB TYPE



COVRTS & GASKET WITH SCREWS

SIZE: 1/2"-3/4"-1"-1-1/4"-1-1/2"-2"

STEEL BOXES



SA 4x2



SA 4x4



SA 4x2
Spraying on the surface



SA 4x4
Spraying on the surface

SWITCH & SOCKET BOXES



3x3



3x6



GI ADAPTABLE BOXES

IN.	HxWxD (mm)
4x4x3	100x100x75
6x6x3	150x150x75
9x9x3	225x225x75
12x12x4	300x300x100

DEEP: 16mm 25mm 35mm 47mm

4" SQUARE CONDUIT BOXES

52151



1-1/2" Deep

52171



2-1/8" Deep

53151



1-1/2" Deep

HOLES: 1/2", 3/4", 1/2" & 3/4"

4" OCTAGONAL CONDUIT BOXES

54151



1-1/2" Deep

54171



2-1/8" Deep

55151



1-1/2" Deep

HOLES: 1/2", 3/4", 1/2" & 3/4"

4-11/16" SQUARE CONDUIT BOXES

72151



1-1/2" Deep

72171



2-1/8" Deep

73171



2-1/8" Deep

HOLES: 1/2", 3/4", 1/2" & 3/4"

4-11/16" SQUARE CONDUIT BOXES

58361



1-7/8" Deep

59361



1-7/8" Deep

58C1



HOLES: 1/2", 3/4", 1/2" & 3/4"

4-11/16" SQUARE CONDUIT BOXES

52C6



54C6



72C6



54C6R



JUNCTION BOXES

Made of 0.9/11mm thickness sheet steel.

CAT #	Depth(mm)	Size(mm)
011010	55	100x100
011515	55	150x150
012020	55	200x200
012525	55	250x250
013030	55	300x300
021010	55	100x100
021515	75	150x150
022020	75	200x200
022525	75	250x250
023030	75	300x300
023535	75	350x350
024040	75	400x400
031010	75	100x100
031515	100	200x200
032020	100	250x250
032525	100	100x100
033030	100	300x300



SCREW COVER ENCLOSURES

Material: Steel – Finishes: Painted & galvanized

CAT #	IN.	HxWxD(mm)
644EP	6x4x4	150x150x100
884EP	8x8x4	200x200x100
10104EP	10x10x4	250x250x100
12124EP	12x12x4	300x300x100
16164EP	16x16x4	400x400x100
18184EP	18x18x4	450x450x100



ELEC-GALVANIZED BOX



CAT NO.	SIZE
A01	100x65x65
A11	100x100x65
B12	200x100x100
B15	150x150x100
B22	200x200x100
B23	300x200x100
C23	300x200x150
C34	400x300x150

CHUQUI BOX




118x76x40

FLOOR OUTLET



- Complete with single universal receptacle
- Complete with duplex power outlet without grounding
- Complete with duplex power outlet with grounding
- Complete with telephone jack

PLAIN SUPPORT CHANNEL



Material: Steel
Finished: Pre-galvanized
Hot Dip galvanized
Length: 2mtr, 3mtr, 6mtr

CAT NO.	METRIC SIZE	US SIZE
4121	41mmx21mm	1-5/8"x13/16"
4141	41mmx41mm	1-5/8"x1-5/8"


SLOTTED SUPPORT CHANNEL



Material: Steel
Finished: Pre-galvanized
Hot Dip galvanized
Length: 2mtr, 3mtr, 6mtr

CAT NO.	METRIC SIZE	US SIZE
4121	41mmx21mm	1-5/8"x13/16"
4141	41mmx41mm	1-5/8"x1-5/8"

RIEL & RIEL DIN

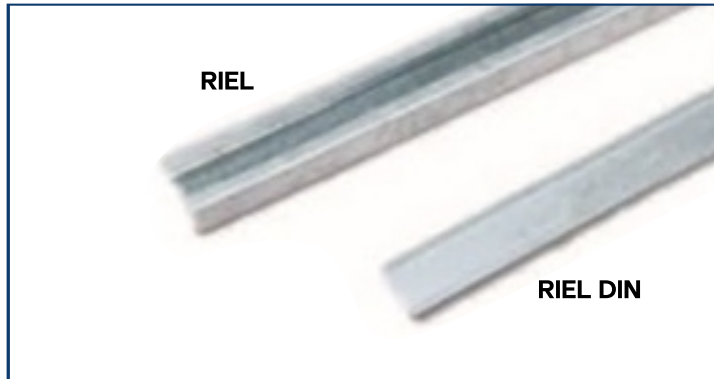

SIZE: 19x35x1.5

STRUT CLAMPS

LIGHT TYPE



HEAVY TYPE



SIZE: 1/2"-3/4"-1"-1 1/4"-1 1/2"-2"

THREAD BOLTS



SIZE: 1/4"-5/16"-3/8"-1/2"-5/8"-3/4"
6mm 8mm 10mm 12mm 14mm 16mm

CHANNEL SPRING NUT

LIGHT TYPE



Material: Steel
Finished: Zinc plated

HEAVY TYPE



Material: Steel
Finished: Zinc plated

SIZE: 1/4"-5/16"-3/8"-1/2"-5/8"-3/4"
6mm 8mm 10mm 12mm 14mm 16mm

CLEVIS HANGER

Material: Steel
Finished: Zinc plated



LOOP HANGER

Material: Steel
Finished: Zinc plated



SIZE: 1/2"-3/4"-1"-1 1/4"-1 1/2"-2"

CONDUIT HANGER

Material: Steel
Finished: Galvanised



CONDUIT FASTENER

Material: Steel
Finished: Black/Galvanised



SIZE: 1/2"-3/4"-1"-1 1/4"-1 1/2"-2"

CABLE TRAY

TYPE	H(mm)	W(mm)	LENGTH(mm)
CT100X25	100	25	2900/3000
CT150X25	150	25	2900/3000
CT225X25	225	25	2900/3000
CT300X25	300	25	2900/3000
CT100X50	100	50	2900/3000
CT150X50	150	50	2900/3000
CT225X50	225	50	2900/3000
CT300X50	300	50	2900/3000
CT450X50	450	50	2900/3000
CT600X50	600	50	2900/3000
CT750X50	750	50	2900/3000
CT100X100	100	100	2900/3000
CT150X100	150	100	2900/3000
CT225X100	225	100	2900/3000
CT300X100	300	100	2900/3000
CT450X100	450	100	2900/3000
CT600X100	600	100	2900/3000
CT750X100	750	100	2900/3000



Finishing

- 1.PreGalvanized Steel
- 2.Hot Dip Galvanized
- 3.Epoxy coated
- 4.Stainless steel 304/306

CABLE TRUNKING

TYPE	H(mm)	W(mm)	LENGTH(mm)
CK50X50	100	25	2900/3000
CK75X50	150	25	2900/3000
CK100X50	225	25	2900/3000
CK100X75	300	25	2900/3000
CK100X100	100	50	2900/3000
CK150X50	150	50	2900/3000
CK150X75	225	50	2900/3000
CK150X100	300	50	2900/3000
CK150X150	450	50	2900/3000



Finishing

- 1.PreGalvanized Steel
- 2.Hot Dip Galvanized
- 3.Epoxy coated
- 4.Stainless steel 304/306

Please indicate type of material, thickness, finish and length when ordering other sizes and designs are available upon customers' request all accessories are available

CABLE LADDER

TYPE	H(mm)	W(mm)	LENGTH(mm)
CL50X100	50	100	2900/3000
CL50X150	50	150	2900/3000
CL50X200	50	200	2900/3000
CL50X250	50	250	2900/3000
CL50X300	50	300	2900/3000
CL50X450	50	450	2900/3000
CL50X600	50	600	2900/3000
CL100X150	100	150	2900/3000
CL100X200	100	200	2900/3000
CL100X300	100	300	2900/3000
CL100X450	100	450	2900/3000
CL100X600	100	600	2900/3000
CL100X750	100	750	2900/3000
CL100X900	100	900	2900/3000



Finishing

- 1.PreGalvanized Steel
- 2.Hot Dip Galvanized
- 3.Epoxy coated
- 4.Stainless steel 304/306

WIREMESH CABLE TRAY

TYPE	H(mm)	W(mm)	Diameter(mm)
CM50X50	50	50	5
CM50X100	50	100	5
CM50X150	50	150	5
CM50X200	50	200	5
CM50X300	50	300	5
CM50X400	50	400	5
CM50X450	50	450	5
CM50X500	50	500	5
CM50X600	50	600	5
CM100X100	100	100	5
CM100X150	100	150	5
CM100X200	100	200	5
CM100X300	100	300	5
CM100X400	100	400	5
CM100X450	100	450	5
CM100X500	100	500	5
CM100X600	100	600	5



Finishing

EZ (Electro zinc plating $\geq 10\mu\text{m}$)
 HDG (Hot dip galvanizing $\geq 60\mu\text{m}$)
 PC (Powder coated)
 SS304/SS316/SS316L

Please indicate type of material, thickness, finish and length when ordering other sizes and designs are available upon customers' request all accessories are available



 www.ies.gy
 quotes@ies.gy